



Brake Motor 90W




List of Motor Characteristics

Model of Motor		Output	Voltage	Frequency	Poles	Duty	Rated				Starting Torque		Capacitor/Ve
							Speed	Current	Torque		N.m	kgf.cm	
Motor	Motor with gear shaft	W	V	Hz	P	r/min	A	N.m	kgf.cm	N.m	kgf.cm	μF/VAC	
5RK90A-AMF	5RK90GU-AMF	90	1ph110	50	4	30Min	1350	1.55	0.64	6.40	0.48	4.80	25.0/250
5RK90A-CMF	5RK90GU-CMF	90	1ph220	50	4	30Min	1350	0.70	0.64	6.40	0.48	4.80	6.0/450
5RK90A-SMF	5RK90GU-SMF	90	3ph220	50	4	30Min	1350	0.66	0.66	6.60	2.30	23.00	/
5RK90A-S ₃ MF	5RK90GU-S ₃ MF	90	3ph380	50	4	30Min	1350	0.38	0.66	6.60	2.30	23.00	/

•The capacitor capacitance will be different under different voltage. A correct capacitor capacitance is required to match the applied voltage. •Wrong capacitor capacitance is the cause of trouble. You must confirm a correct voltage and select a correct model when your purchase order is placed.

Overall Dimension of Gearbox

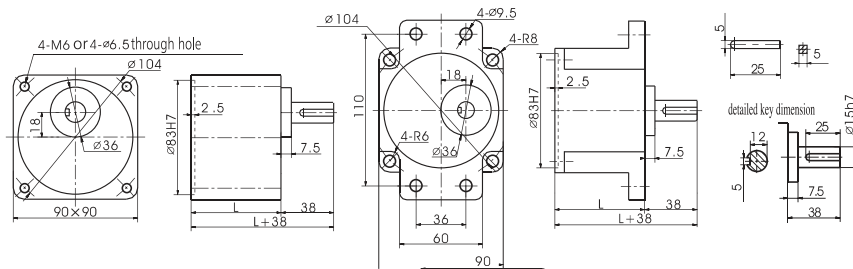


	Reduction Ratio	L(mm)	Weight (kg)
Gearbox	5GU3K-GU9K	65	1.21
	5GU10K-GU18K		1.30
	5GU20K-GU75K		1.40
	5GU90K-GU200K		1.45
Motor			3.60

Allowable Torque on Gearbox

Model of Gearbox: 5GU □ K

Frequency	Reduction Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150
			Output Shaft Speed	r/min	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15
50Hz	Allowable Torque	N.m	1.55	1.86	2.58	3.10	3.87	4.64	4.65	5.81	6.98	8.37	8.40	10.5	12.6	15.1	16.8	19.6	19.6	19.6	19.6	19.6	19.6	19.6
		kgf.cm	15.8	19.0	29.2	31.6	39.6	47.2	47.4	59.3	71.2	85.4	85.7	107	129	154	171	200	200	200	200	200	200	200
60Hz	Output Shaft Speed	r/min	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12
		Allowable Torque	N.m	1.35	1.62	2.25	2.70	3.37	4.04	4.05	5.06	6.07	7.29	7.32	9.15	11.0	13.2	14.6	18.3	19.6	19.6	19.6	19.6	19.6
		kgf.cm	13.8	16.5	23.0	27.6	34.4	41.2	41.3	51.6	61.9	74.4	74.7	93.4	112	135	149	187	200	200	200	200	200	

Capacitor




capacity μF	Voltage	L±1	W±1	H±1	Type
6.0	450	47	26	38	Down-lead
25.0	250	68	32	56	



Model of Gearbox: 5GU □ K

Frequency	Reduction Ratio		180	200
			Output Shaft Speed	r/min
50Hz	Allowable Torque	N.m	19.6	19.6
		kgf.cm	200	200
60Hz	Output Shaft Speed	r/min	10	9
		Allowable Torque	N.m	19.6
		kgf.cm	200	200

Wiring Diagram



Motor Overall Dimension

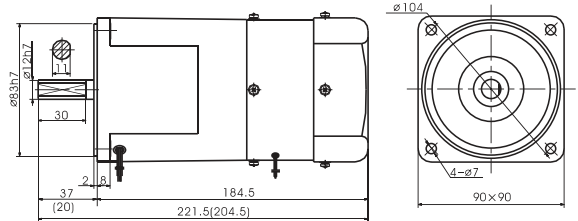

•The value in the () is the value of small gear shaft motor.